


ADAPTOR P-AD

Features

- ◆ Low insertion loss
- ◆ Low backreflection loss
- ◆ Easy to handle
- ◆ Environmentally stable

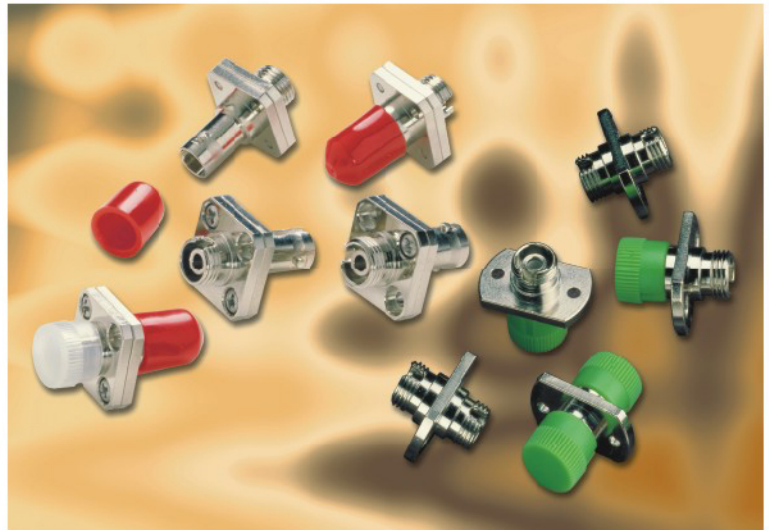

ITEM	Adaptor		
	Ceramic	Bronze	
		Singlemode	Multimode
Sleeve Material			
Typical Insertion Loss, dB	0.1	0.1	0.3
Operating Temperature, °C		-40 ~ +75	
Storage Temperature, °C		-55 ~ +85	

P-AD- - -

Connector Type

- | | |
|--|-------------------------------|
| AP.....FC/APC type | BI.....Biconic type |
| AS.....SC/APC type | SA.....SMA type |
| FC.....FC type | D4.....D4 type |
| OF.....One piece FC type | SC.....SC type |
| FA.....Die-cast FC type | ST.....ST type |
| DA.....D-hole FC/APC type | DC.....SC/APC Duplex type |
| DF.....D-hole FC type | DS.....SC Duplex type |
| MD.....Miniature Double D-hole FC type | DT.....ST Duplex type |
| FD.....FDDI type | XX.....Others, please specify |

Sleeve Material

- A.....Metal (Singlemode)
- B.....Metal (Multimode)
- C.....Ceramic

Connector Type

- | | |
|--|-------------------------------|
| AP.....FC/APC type | BI.....Biconic type |
| AS.....SC/APC type | SA.....SMA type |
| FC.....FC type | D4.....D4 type |
| OF.....One piece FC type | SC.....SC type |
| FA.....Die-cast FC type | ST.....ST type |
| DA.....D-hole FC/APC type | DC.....SC/APC Duplex type |
| DF.....D-hole FC type | DS.....SC Duplex type |
| MD.....Miniature Double D-hole FC type | DT.....ST Duplex type |
| FD.....FDDI type | XX.....Others, please specify |

Applications

- ◆ Telecommunications
- ◆ Local area Network
- ◆ Fiber-to-the-home
- ◆ Fiber optic sensors
- ◆ Testing instruments
- ◆ CATV

